


MiniSmart

Instantaneous Water Heater



When combined with the Prestige Condensing wall boiler, the Mini Smart provides instantaneous and plentiful domestic hot water.

- 2" of Water Blown Foam Insulation
- Light Weight and Compact
- 3 Gallons per Minute Capacity
- Ideal for Closet Installation

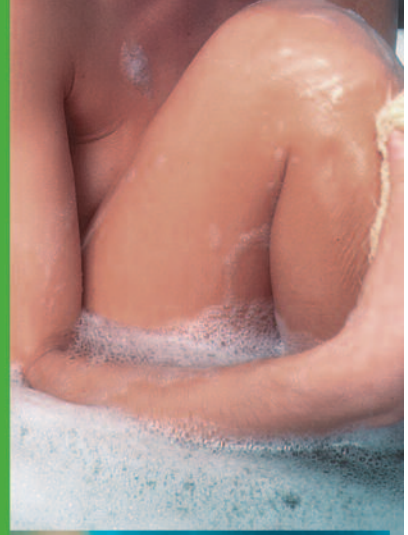



Mini Smart

Instantaneous Domestic Hot Water

Specifications

Model	Dimensions		Distance between Mounting Holes	Volume (Boiler Side) Gal.	Weight Empty Lbs.	Weight Filled Lbs.
	Diameter with insulation	Length with insulation				
MS-3	9 1/4"	18"	21"	2.5	28	47

- Boiler Side Pressure Drop - 1ft of Head at 6 gpm flow rate

Connection Dimensions

- ✓ Domestic hot and cold connections - 1/2" NPT
- ✓ Boiler supply and return connections - 3/4" NPSC
- ✓ Sensor connection - 1/2" NPSC

Performance Specification

- ✓ 3 gpm (120°F Domestic Outlet Temperature) intermittent draw based on 70°F average temperature rise with 50°F Domestic Inlet Temperature.

Standard Equipment

- ✓ Fully insulated
- ✓ NTC sensor with wire leads and threaded connector [compatible with the Honeywell MCBA Control]*
- ✓ Precise temperature control/digital read out when installed with Prestige Condensing Boiler
- ✓ Light weight
- ✓ Compact
- ✓ Complete with mounting hardware

* When used with a boiler control other than a Honeywell MCBA, the sensor can be replaced with a drywell and aquastat (not provided)



One Triangle Lane • Bladwood NJ 08012

p 856.228.8881 f 856.228.3584 www.triangletube.com

